

B Series – 7000

Walk-around



Length	7 m
LOA	7.5 m
Beam	2.5 m
HP rating	250
Maximum engine weight (kg)	400
Dead rise at transom (degrees)	20
Side height from deck	680
Bottom Plate	6mm
Side plate	4mm
Transom	6mm
Side decks	4mm
Floors	4mm
Console/ cabin	3mm
6mm Stringers and Keel bar	✓
Engine shaft length	25" (XL)
Maximum people offshore	6
Positive foam flotation	Basic
Under floor Fuel tank in Safety cell – Side deck fill (not floor)	300L
Fresh water capacity	120L
Recommended trailer GTM (kg)	3300kg
Approximate package weight on alloy trailer (no fuel/water)	2600kg
Length on trailer (approx.)	8.5 m
Structural warranty	5 year



B Series – 7400

Walk-around

Length	7.4 m
LOA	7.9 m
Beam	2.5 m
HP rating	300
Maximum engine weight (kg)	440
Dead rise at transom (degrees)	20
Side height from deck	680
Bottom Plate	6mm
Side plate	4mm
Transom	6mm
Side decks	4mm
Floors	4mm
Console/ cabin	3mm
6mm Stringers and Keel bar	✓
Engine shaft length	25" (XL)
Maximum people offshore	6
Positive foam flotation	Basic
Under floor Fuel tank in Safety cell – Side deck fill (not floor)	300L
Fresh water capacity	120L
Recommended trailer GTM (kg)	3300kg
Approximate package weight on alloy trailer (no fuel/water)	2800kg
Length on trailer (approx.)	9 m
Structural warranty	5 year

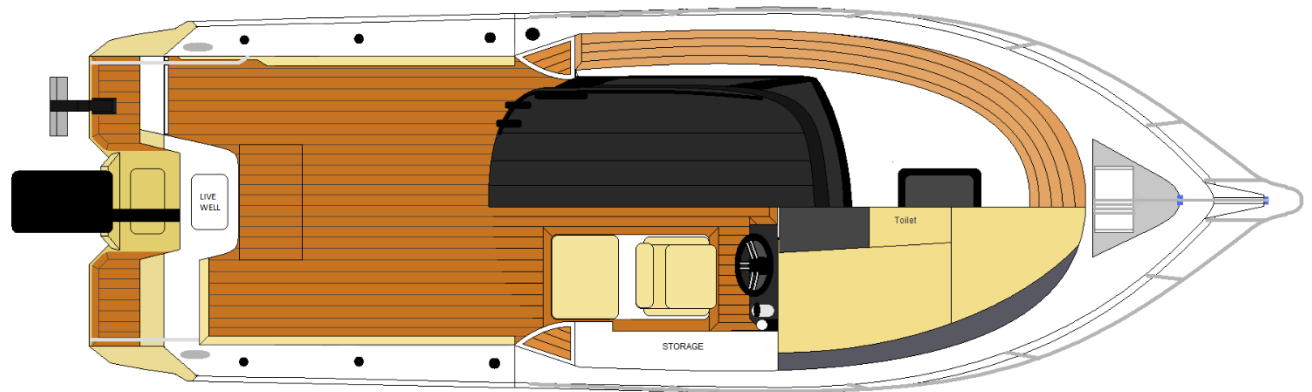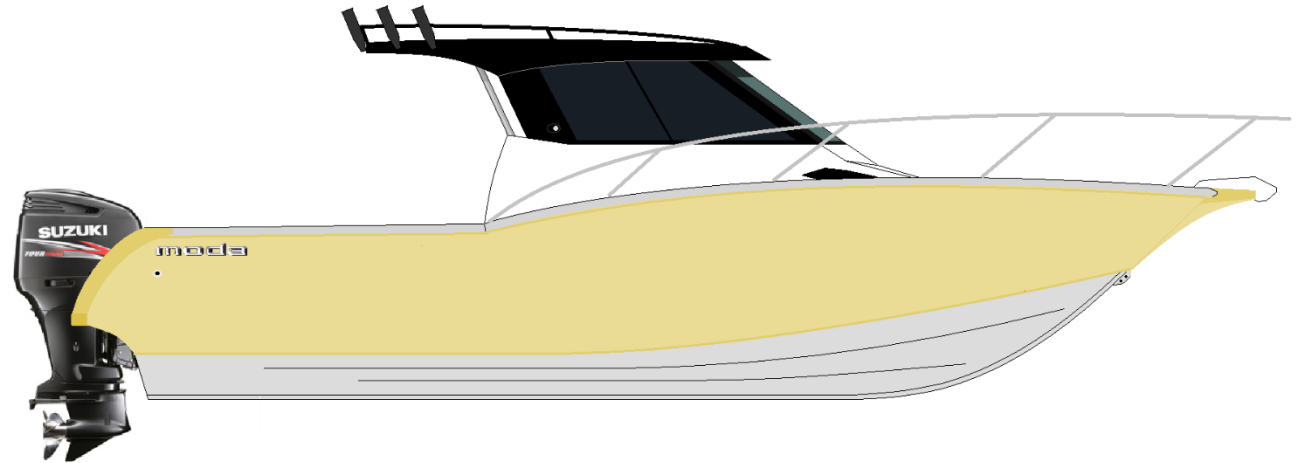

B Series – 7800

Walk-around

Length	7.8 m
LOA	8.3 m
Beam	2.5 m
HP rating	400
Maximum engine weight (kg)	550
Dead rise at transom (degrees)	22
Side height from deck	680
Bottom Plate	6mm
Side plate	4mm
Transom	6mm
Side decks	4mm
Floors	4mm
Console/ cabin	3mm
6mm Stringers and Keel bar	✓
Engine shaft length	25" (XL)
Maximum people offshore	7
Positive foam flotation	Basic
Under floor Fuel tank in Safety cell – Side deck fill (not floor)	2 x 250L
Fresh water capacity	120L
Recommended trailer GTM (kg)	3500kg
Approximate package weight on alloy trailer (no fuel/water)	3000kg
Length on trailer (approx.)	9.5 m
Structural warranty	5 year

